


## Feature

- Single Output to 48W
- Desktop Type Class I & II Power Supply
- IEC/EN/UL 60950-1 2nd
- DoE Level VI & CoC Tier 2 Efficiency

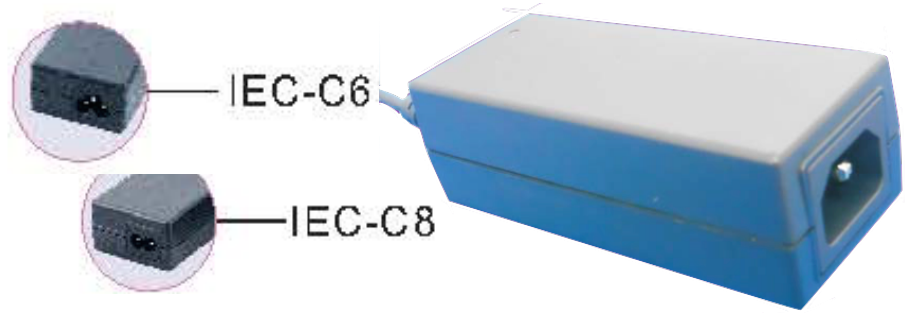

## FPA048 Series

Model	FPA048-V*121	FPA048-V*12	FPA048-V*15	FPA048-V*18	FPA048-V*19	FPA048-V*24	FPA048-V*28	FPA048-V*36	FPA048-V*48
<b>Output Voltage</b>	12	12V	15V	18V	19V	24V	28V	36V	48V
<b>Output Current</b>	3.3A	4A	3.2A	2.66A	2.56A	2A	1.71A	1.33A	1A
<b>Max Power</b>	39.6W	48W	48W	48W	48W	48W	48W	48W	48W
<b>Input Power</b>	90 - 264 Vac								
<b>Input Frequency</b>	47 - 63 Hz								
<b>Input Current</b>	1.0 ~ 1.5A Max.								
<b>Regulation</b>	Line 1%, Load 5%								
<b>Ripple &amp; Noise</b>	1~2% Vp-p Max.								
<b>Efficiency</b>	DoE Level VI & CoC Tier 2								
<b>Operating Temp.</b>	0 to 40C								
<b>Storage Temp.</b>	-20 to +85C								
<b>OVP</b>	Auto Recovery								
<b>SCP</b>	Auto Recovery								
<b>Standard</b>	IEC/EN/UL 60950-1 2nd Edition,								
<b>Safety</b>	CB/ cULus/FCC/GS/CE/PSE/RCM								
<b>AC inlet</b>	Class I C14 & C6 ; Class II C8 Available								