


Feature

- Power Device (PD) Detection & Classification
- Fully Autonomous Operation w/o Microcontroller
- IEEE 802.3at Compatible
- Class I & Class II Available
- Low Ripple Noise

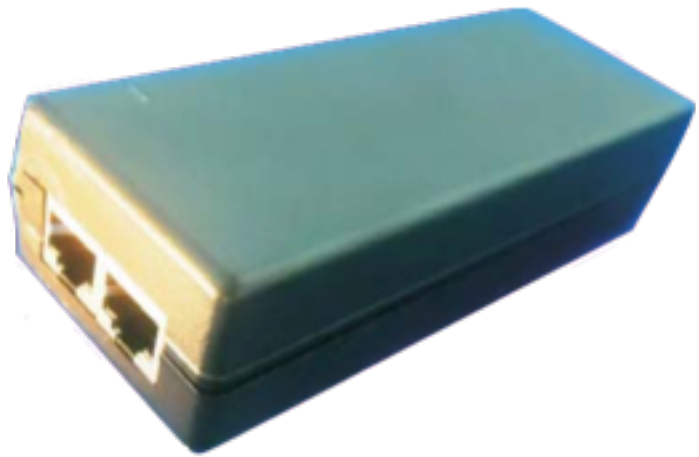

FPP030 Series

Model	FPP030
Output Voltage Range	36-56V
Output Current Max.	0.83A
Output Watt Max.	30W
Data Rate	1000M
Input Power	90 - 264 Vac
Input Frequency	47 - 63 Hz
Input Current	1A Max.
Inrush Current	40A Max.
Efficiency	> 87%
Operating Temp.	0 to 40C
Storage Temp.	-20 to +70C
OVP	Auto Recovery
SCP	Auto Recovery
Standard	CB
Safety	FCC/ CE
AC Inlet	Class I C14 & C6 ; Class II C8